



Wall Mount Interconnect Center (SWIC3)

The Wall Mount Interconnect center (SWIC3) is a cost-effective fiber enclosure designed to manage and protect up to 192 fibers using SC, ST or LC adapter plates and up to 768 with MTP adapter plates. The low-profile, compact design makes it ideal for telecommunications rooms or other installation areas where wall space is a premium. The adapter mounting method is based on Siemon's Quick-Pack® adapter plates also used in the family of Rack Mount Interconnect Centers (RIC3).

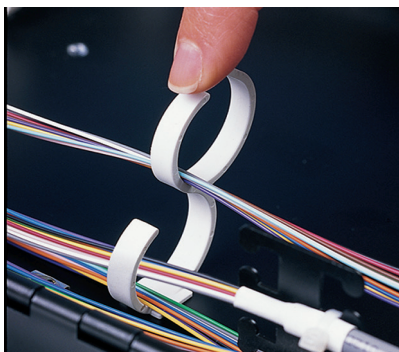

SWIC3-M, SWIC3
Dual-Level Fiber Managers incorporate two independent levels of storage to enable fiber to be routed at levels that correspond to the adapters

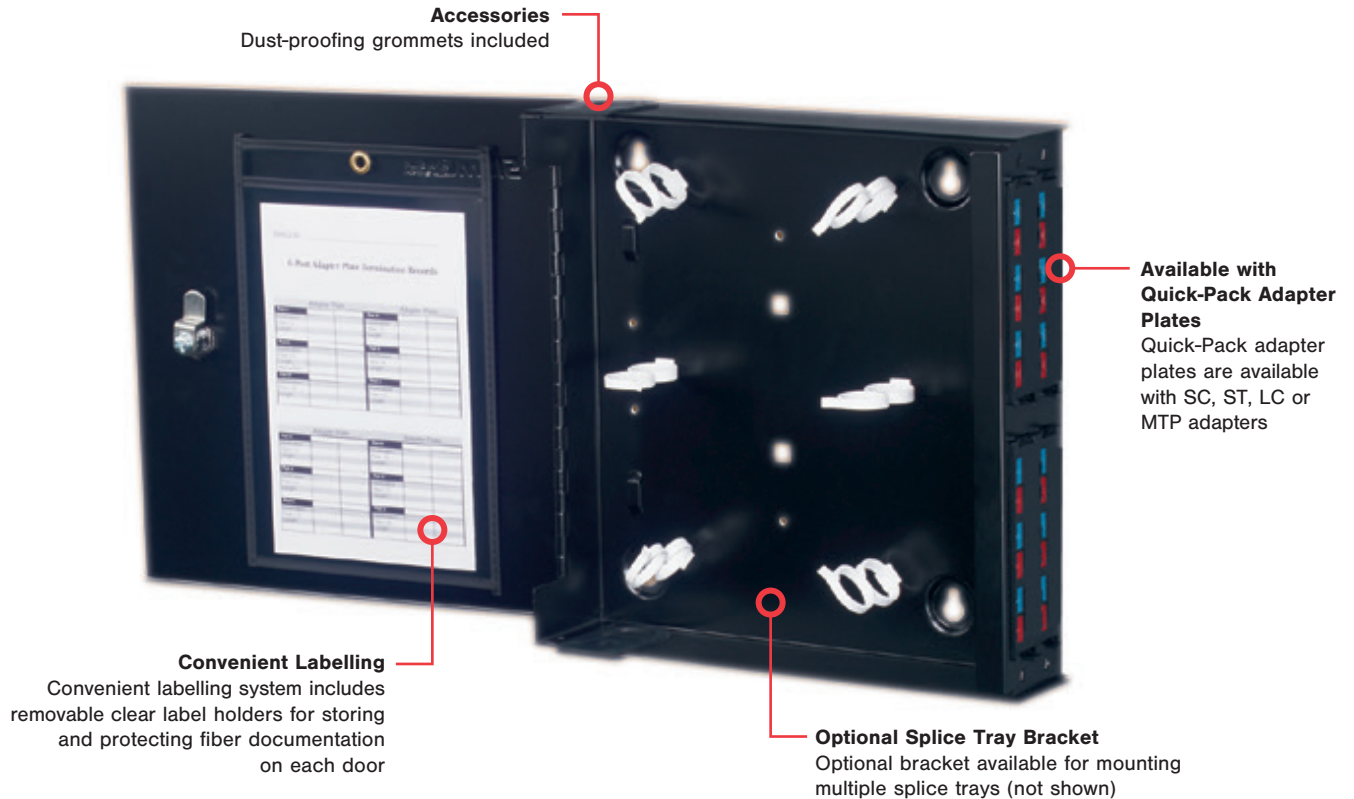

Door Options
Doors on enclosure can be ordered with independent key lock or latching options



Snap-In Adapter Plates
Utilizes same Quick-Pack adapter plates as RIC3 enclosures with integrated latches for snap-in installation and single-finger removal

Ordering Information

| Part Number | Description |
|--------------|--|
| SWIC3-M-01* | Mini Wall Mount Interconnect Centre, black, accepts 2 Quick-Pack® adapter plates height: 218.4mm (8.6 in.) width: 185.4mm (7.3 in.) depth: 82.6mm (3.25 in.) *Does not accept splice trays |
| SWIC3-(X)-01 | Wall Mount Interconnect Centre, black. Includes dual-level fiber managers, port designation labels and removable pocket, dust-proofing grommets, strain relief hardware, cable ties, and mounting hardware, accepts 4 Quick-Pack adapter plates height: 311mm (12.25 in.) width: 311mm (12.25 in.) depth: 82.6mm (3.25 in.) |

Use 1st (X) to specify type of lock on the enclosure (left) door:
A = Key Lock, C = Thumb-turn Latch



SWIC3-M-01




SWIC3-(X)-01

Accessories

Fiber Splice Tray Brackets

| Part Number | Description |
|-------------|---|
| TRAY-B-01 | Bracket for mounting splice trays to SWIC3 base |



TRAY-B-01

Fiber Splice Trays

| Part Number | Description |
|-------------|---|
| TRAY-M-3 | Mini splice tray for up to 12 fusion splices with sleeve protection |



TRAY-M-3

Product Information

MAXIMUM SWIC3 Fiber CAPACITY

| # Fibers per Quick Pack | Adapter Options | SWIC3-M | SWIC3 |
|-------------------------|-----------------|---------|-------|
| 6 | ST, SC | 12 | 24 |
| 8 | ST, SC | 16 | 32 |
| 12 | ST, SC | 24 | 48 |
| 16 | LC | 32 | 64 |
| 24 | LC | 48 | 96 |
| 96 | MTP | 192 | 384 |

MAXIMUM SPLICING CAPACITY

| Splice Type | SWIC3 |
|-------------|-------|
| Fusion | 48 |


Product Information

Quick-Pack® Adapter Plates


Siemon's patented Quick-Pack adapter plates feature an integrated latch, which provides single-finger access to fiber even in fully populated enclosures.

XGLO® & LightSystem®


RIC-F-SC6-01
3 duplex SC adapters
(6 fibers)




RIC-F-SC8-01
4 duplex SC adapters
(8 fibers)




RIC-F-SC12-01
6 duplex SC adapters
(12 fibers)




RIC-F-SCQ6-01
3 duplex SC adapters
(6 fibers), aqua adapters
(not shown)




RIC-F-SCQ8-01
4 duplex SC adapters
(8 fibers), aqua adapters
(not shown)




RIC-F-SCQ12-01
6 duplex SC adapters
(12 fibers), aqua adapters
(not shown)




RIC-F-SCE6-01
3 duplex SC adapters
(6 fibers), erika violet adapters
(not shown)




RIC-F-SCE8-01
4 duplex SC adapters
(8 fibers), erika violet adapters
(not shown)




RIC-F-SCE12-01
6 duplex SC adapters
(12 fibers), erika violet adapters
(not shown)




RIC-F-L(X)12-01C....
3 quad LC adapters
(12 fibers), beige adapters
(not shown)




RIC-F-L(X)16-01C....
4 quad LC adapters
(16 fibers), beige adapters
(not shown)




RIC-F-L(X)24-01C....
6 quad LC adapters
(24 fibers), beige adapters
(not shown)




RIC-F-L(X)U12-01C.
3 quad LC adapters
(12 fibers), blue adapters
(not shown)




RIC-F-L(X)U16-01C.
4 quad LC adapters
(16 fibers), blue adapters
(not shown)




RIC-F-L(X)U24-01C.
6 quad LC adapters
(24 fibers), blue adapters
(not shown)




RIC-F-L(X)Q12-01C.
3 quad LC adapters
(12 fibers), aqua adapters



RIC-F-L(X)Q16-01C.
4 quad LC adapters
(16 fibers), aqua adapters




RIC-F-L(X)Q24-01C.
6 quad LC adapters
(24 fibers), aqua adapters



RIC-F-L(X)E12-01C.
3 quad LC adapters
(12 fibers), erika violet adapters



RIC-F-L(X)E16-01C.
4 quad LC adapters
(16 fibers), erika violet adapters



RIC-F-L(X)E24-01C.
6 quad LC adapters
(24 fibers), erika violet adapters



(X) _____
C = Standard LC Adapter
S = Shuttered LC Adapter




* Optional Shuttered LC adapters feature a small plastic shutter door that opens upon insertion without touching the connector endface and springs back into the closed position upon removal to ensure protection of empty ports.

LightSystem®


RIC-F-SA6-01
3 duplex ST adapters
(6 fibers)



RIC-F-SA8-01
4 duplex ST adapters
(8 fibers)



RIC-F-SA12-01
6 duplex ST adapters
(12 fibers)



RIC-F-BLNK-01
Blank adapter plate



Only recommended for push-pull ST connectors due to limited access



RIC-F-MP(XX)-01-(X) ----- MTP adapter plate

| Fiber Count | Key Orientation |
|--------------------------|--|
| 12 = 12 (1 MTP adapter) | Blank = Opposed (key up to key down) Black adapters |
| 24 = 24 (2 MTP adapters) | Q = Opposed (key up to key down) Aqua adapters |
| 48 = 48 (4 MTP adapters) | E = Opposed (key up to key down) Erika Violet adapters |
| 72 = 72 (6 MTP adapters) | B = Aligned (key up to key up) Grey adapters |
| 96 = 96 (8 MTP adapters) | |

Each adapter plate with icon pockets includes red, blue, black, and clear icons with paper labels. All SC and ST adapters are "universal" to support Multimode and Singlemode.

Because we continuously improve our products, Siemon reserves the right to change specifications and availability without prior notice.

North America
P: (1) 860 945 4200

Asia Pacific
P: (61) 2 8977 7500

Latin America
P: (571) 657 1950/51/52

Europe
P: (44) 0 1932 571771

China
P: (86) 215385 0303

India, Middle East & Africa
P: (971) 4 3689743

Siemon Interconnect Solutions
P: (1) 860 945 4213
www.siemon.com/SIS

Mexico
P: (521) 556 387 7708/09/10

